


BENDING DRAWING
REFERENCE ONLY





BACK VIEW

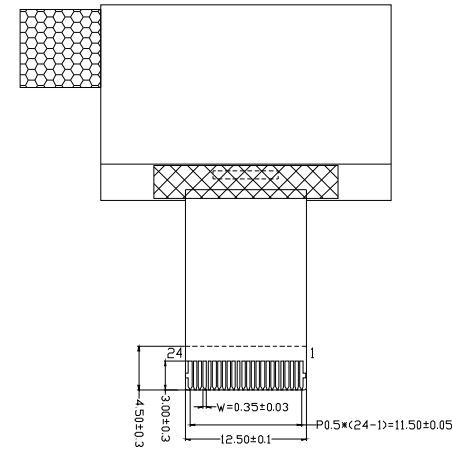

FPC PIN DESCRIPTION

1	VPP
2	VCOMH
3	IRF
4	D7
5	D6
6	D5
7	D4
8	D3
9	D2
10	D1
11	D0
12	RDB
13	WRB
14	A0
15	RESB
16	CSB
17	P/S
18	C86
19	VDD
20	NC
21	NC
22	NC
23	NC
24	VSS



NOTES:

1. OPERATING TEMPERATURE: -20°C TO 70°C
2. STORAGE TEMPERATURE: -30°C TO 80°C
3. DRIVER IC: SSD1308Z
4. GENERAL TOLERANCE: ±0.2
5. ROHS COMPLIANCY

CUSTOMER APVL	CUSTOMER	DATE	TITLE
DRAWN	SCALE	MI12864RO-W	
DFTG CHK	UNIT	mm	
ENGR CHK	APPROVAL	MODEL	
MULTI-INNO TECHNOLOGY CO.,LTD.			DWG NO
			PAGE 1/1