




PIN DESCRIPTION

NO.	SYMBOL	NO.	SYMBOL
1	NC	17	CS#
2	VCC	18	NC
3	VCDMH	19	BS2
4	IREF	20	BS1
5	D7	21	VDD
6	D6	22	NC
7	D5	23	NC
8	D4	24	NC
9	D3	25	VBREF
10	D2	26	NC
11	D1	27	FB
12	D0	28	VDDDB
13	E/RD#	29	GDR
14	R/W#	30	VSS
15	D/C#	31	NC
16	RES#		

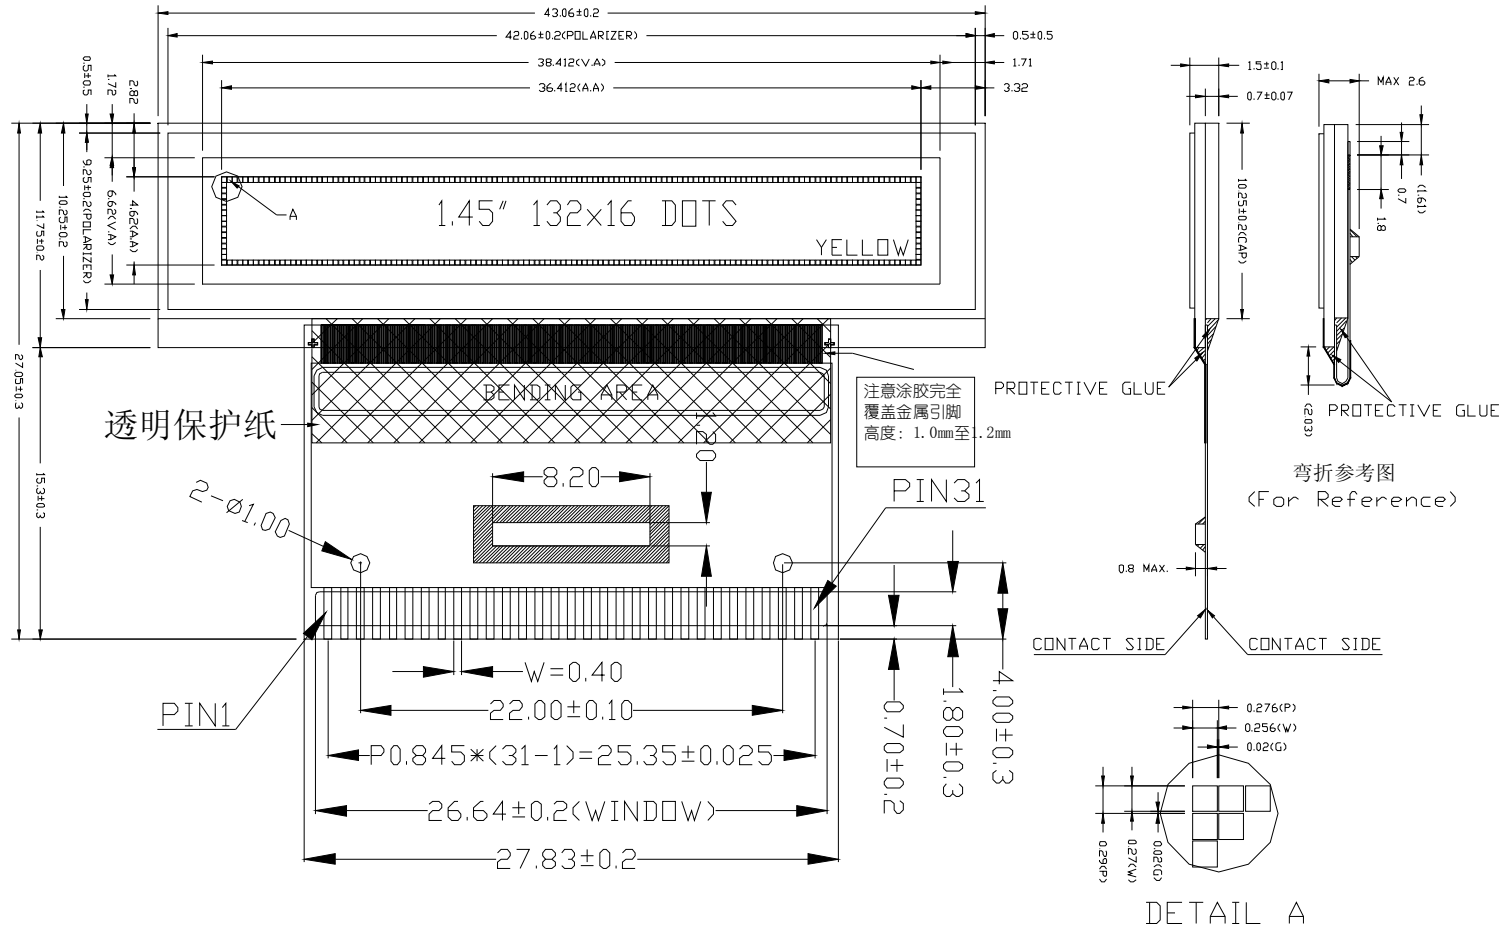

NOTES:

1. OPERATING TEMPERATURE: -20°C TO 70°C
2. STORAGE TEMPERATURE: -30°C TO 80°C
3. DRIVER IC: SSD1305T7R1
4. GENERAL TOLERANCE: ±0.2
5. ROHS COMPLIANCY

CUSTOMER APVL	CUSTOMER	DATE	
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	MI13216BO-Y	
ENGR CHK	mm	MODEL	
APPROVAL			
MULTI-INNO TECHNOLOGY CO.,LTD.		DWG NO	PAGE
			1/1