





环保标准
 C类环保要求(等同ROHS标准)

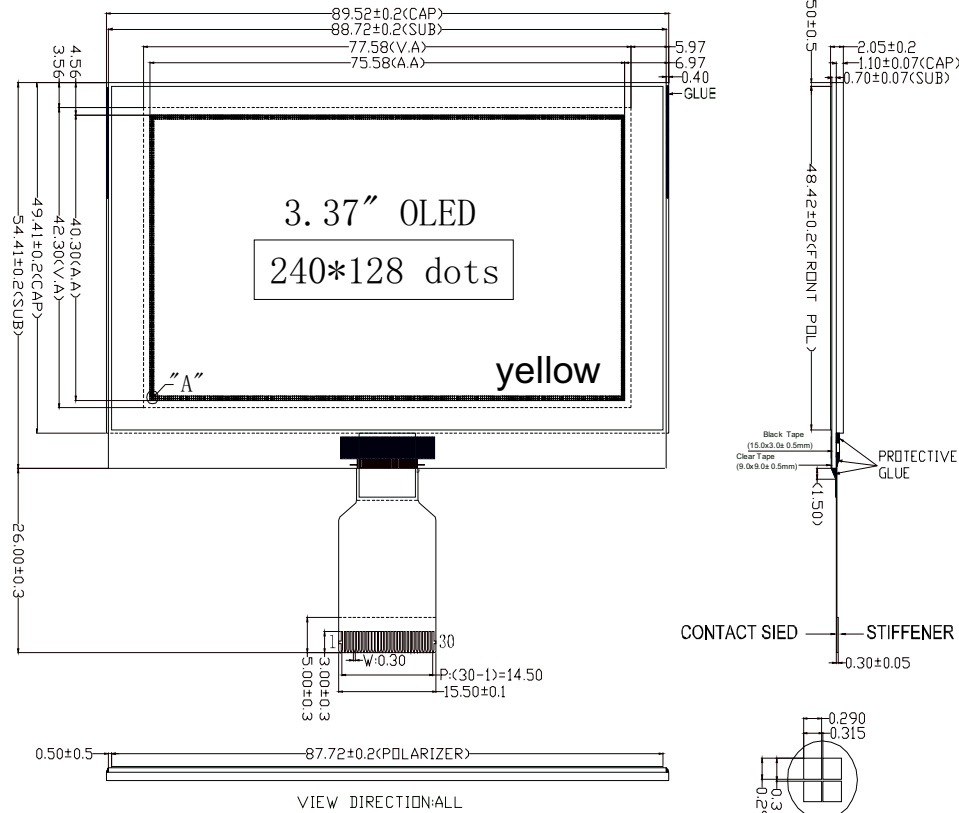

PIN DESCRIPTION

1	NC	16	BS0
2	VSS	17	BS1
3	VCC	18	DC#
4	VCOMH	19	CS#
5	VLSS	20	RES#
6	D7	21	FR
7	D6	22	IREF
8	D5	23	NC
9	D4	24	VDDIO
10	D3	25	VDD
11	D2	26	VCI
12	D1	27	VSL
13	D0	28	VLSS
14	E	29	VCC
15	R/W#	30	NC



NOTES:

1. OPERATING TEMP:-20° C TO 70° C
2. STORAGE TEMP:-30° C TO 80° C
3. VIEWING DIRECTION:ALL
4. OLED DRIVE IC:SSD132ZZ2
5. DISPLAY COLOR:YELLOW
6. UNSPECIFIED TOLERANCES: ± 0.2mm.
7. () MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER (客户在装机时, 自己必须撕掉保护膜)

CUSTOMER APVL	CUSTOMER	DATE	TITLE
DRAWN	SCALE	MI240128AO-Y	
DFTG CHK	UNIT	mm	
ENGR CHK	MODEL		
APPROVAL		DWG NO	PAGE
MULTI-INNO TECHNOLOGY CO.,LTD.			1/1