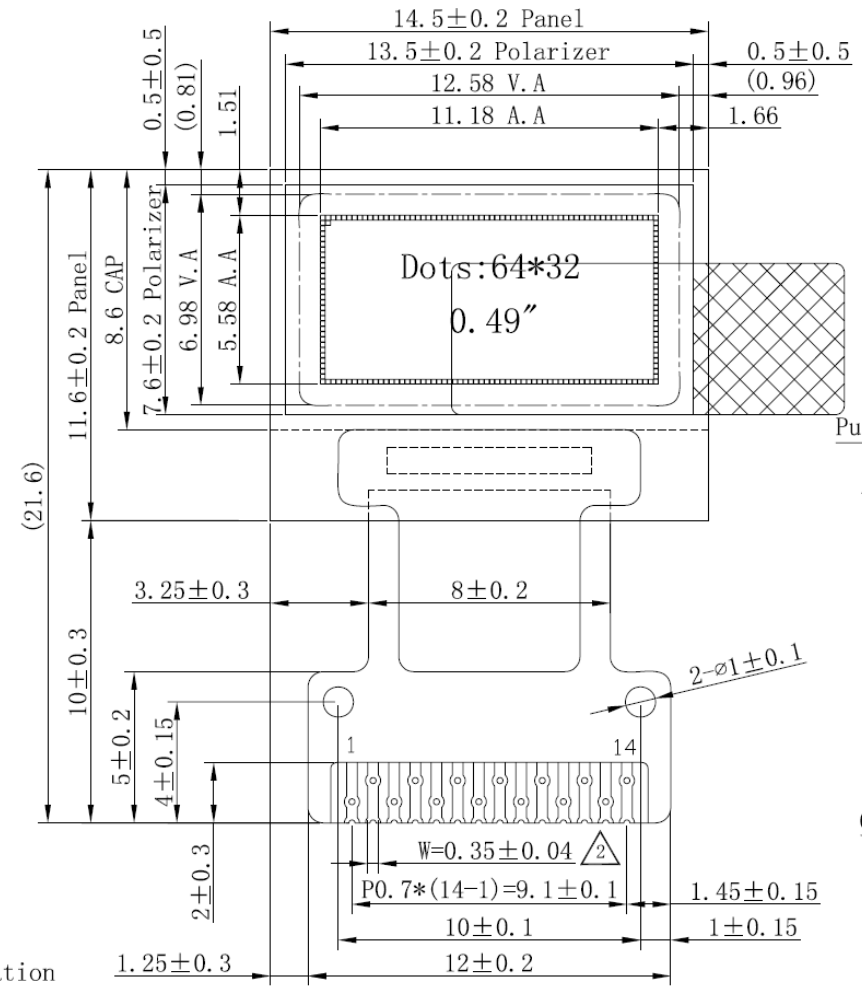

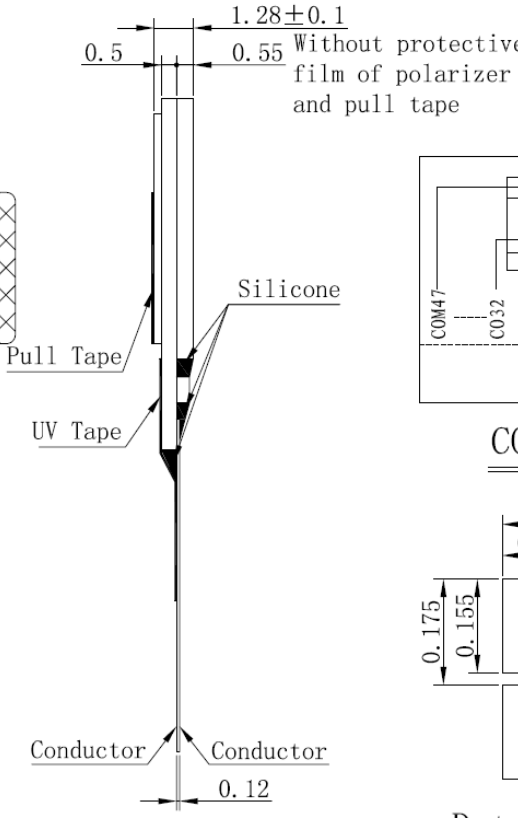

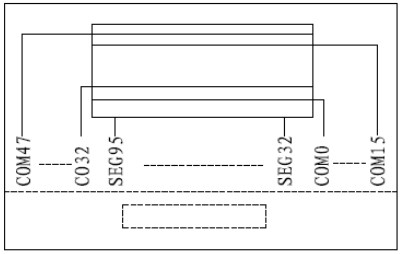

COM&SEG LAYOUT



Detail A (20:1)

Pin Assignment	
NO.	SYMBOL
1	C2P
2	C2N
3	C1P
4	C1N
5	VBAT
6	VBREF (NC)
7	VSS
8	VDD
9	RES#
10	SCL
11	SDA
12	IREF
13	VCOMH
14	VCC

Specification

1. Display: OLED(White)
2. Format: 64*32
3. Driver IC: SSD1306Z
4. General Tolerence: ±0.3
5. Operate temp: -40℃～70℃
   Storage temp: -40℃～85℃
6. DUTY: 1/32
7. RoHS Compliant

CUSTOMER APVL		DATE	
DRAWN	SCALE	TITLE	MI6432AO-W
DFTG CHK	UNIT mm		
ENGR CHK		MODEL	
APPROVAL			
MULTI-INNO TECHNOLOGY CO.,LTD.		DWG NO	PAGE 1/1