




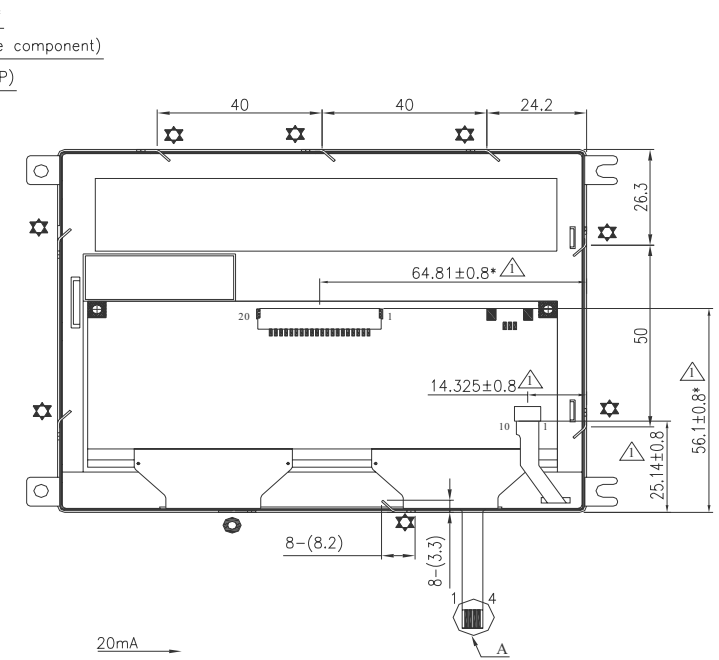


MODULE NO.: MI0570NT

Ver 1.1

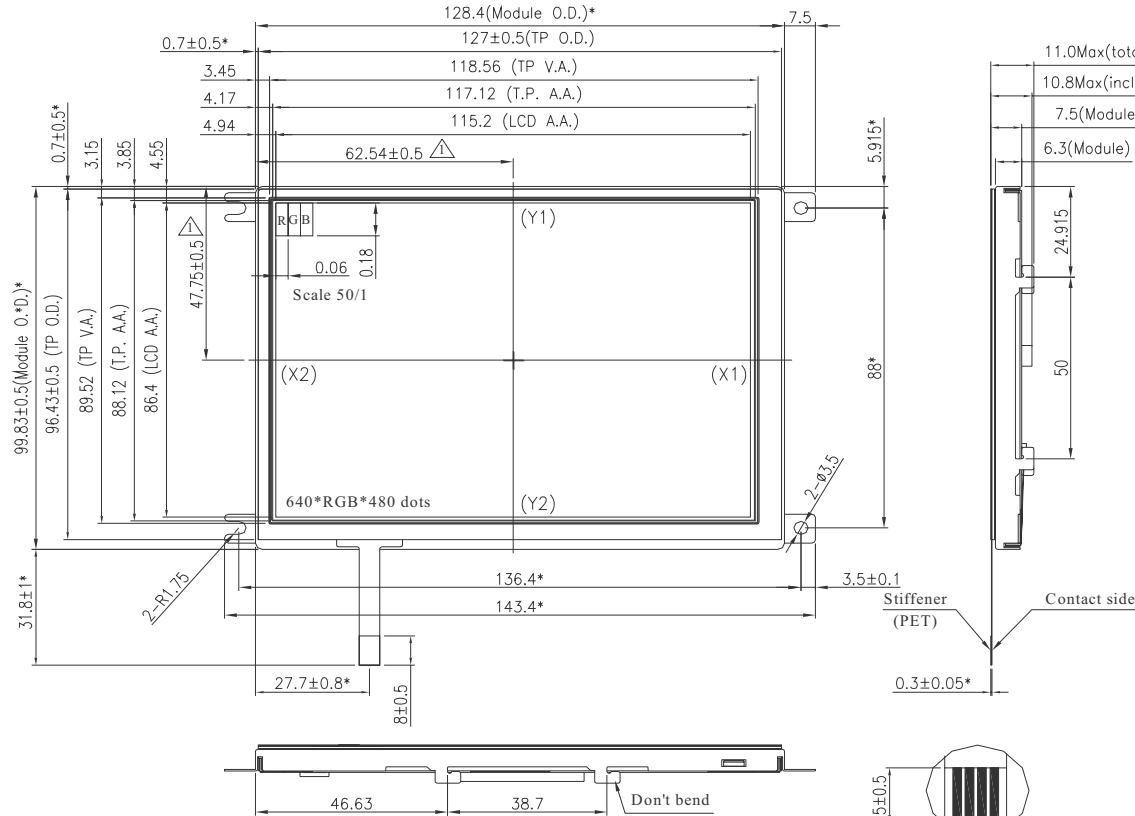

- Note:
- Brightness : 320 cd/m² (Typ)
 - 20 PIN Connector: Hirose DF14A-20P-1.25H or equivalent;
Mates with Hirose DF14-20S-1.25C or equivalent.
 - 10 PIN Connector: Molex: 54548-1071 or Equivalent.
 - TP FPC Match Connector: AMP84952-4 or equivalent
 - Tolerance is ±0.3 unless otherwise noted.
 - ★* to bend, ○*1 don't bend.
 - For RoHS.
 - * is important dimension.

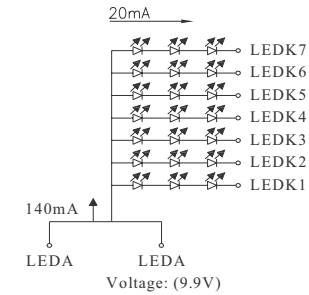

20 PIN FUNCTIONS			
1	Vcc	11	RxIN2-
2	Vcc	12	RxIN2+
3	GND	13	GND
4	GND	14	CKIN-
TP FPC		5	RxIN0-
1	Y1	6	RxIN0+
2	X1	7	GND
3	Y2	8	RxIN1-
4	X2	9	RxIN1+
		10	GND
		15	CKIN+
		16	GND
		17	VLED
		18	VLED
		19	GND
		20	ADJ

CUSTOMER APVL		DATE	
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	MI0570NT	
ENGR CHK	mm	MODEL	
APPROVAL		DWG NO	
MULTI-INNO TECHNOLOGY CO.,LTD.		PAGE	
		1/1	