


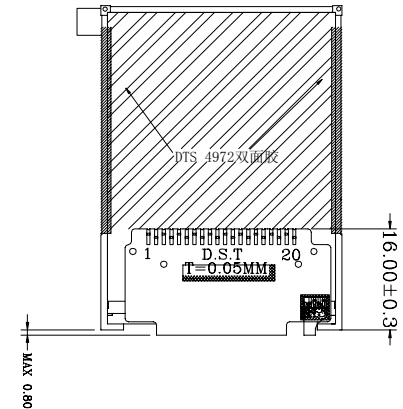
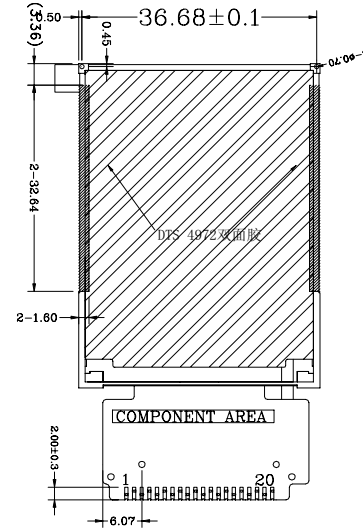


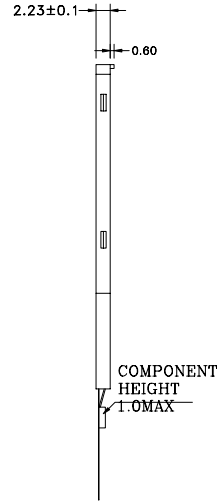


PINS ASSIGNMENT:

1	GND
2	RESET
3	RS
4	WR
5	RD
6	DB00
7	DB01
8	DB02
9	DB03
10	DB04
11	DB05
12	DB06
13	DB07
14	CS
15	VCCIO
16	IC_ID
17	VDD
18	VLED+
19	VLED-
20	GND

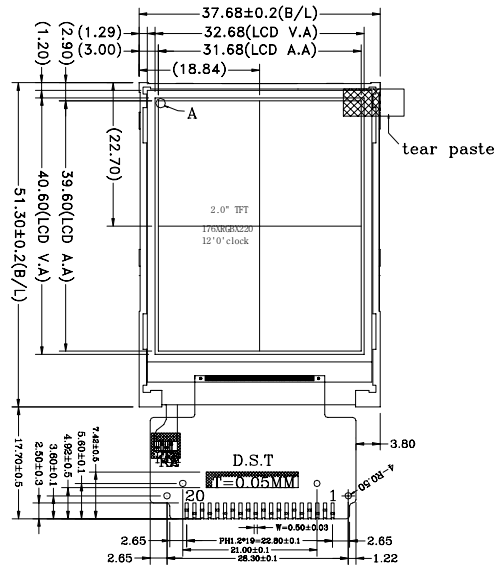

CIRCUIT DIAGRAM



DETAIL A

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE
2. DRIVE METHOD: VDD=2.8V
3. VIEWING DIRECTION: 12 O'CLOCK.
4. IC DRIVER: ILI9225G
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: WHITE LED, If=15mA, Vf=3.2±0.2V.
8. GENERAL TOLERANCE: ±0.2.
9. RECOMMENDED CASE OPEN AREA SHOULD BE LESS THAN MODULE V.A.
10. REFERENCED DIMENSION:()
11. RoHS COMPLIANT.

CUSTOMER APVL	CUSTOMER	DATE	
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	MI0200UT-1	
ENGR CHK	mm	MODEL	
APPROVAL			
MULTI-INNO TECHNOLOGY CO.,LTD.		DWG NO	PAGE
			1/1