


PIN ASSIGNMENT

1	GND	22	DB6
2	IM0	23	DB5
3	IM1	24	DB4
4	IM2	25	DB3
5	IM3	26	DB2
6	RESET	27	DB1
7	VSYNC	28	DB0
8	HSYNC	29	SDI
9	DOTCLK	30	RD
10	ENABLE	31	WR
11	DB17	32	RS
12	DB16	33	CS
13	DB15	34	FMARK
14	DB14	35	IOVCC
15	DB13	36	VCI
16	DB12	37	GND
17	DB11	38	LEDA
18	DB10	39	LEDK1
19	DB9	40	LEDK2
20	DB8	41	LEDK3
21	DB7		

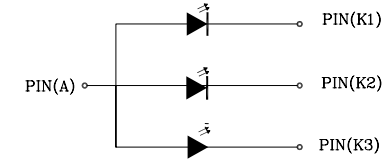

If = 45mA
Vf = 3.2V±0.20

NOTES:

1. DISPLAY TYPE: TFT,262K COLORS,TRANSMISSIVE,NORMALLY WHITE
2. LOGIC VOLTAGE: VCI=2.8V
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: ILI9341V
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: 3-WHITE LED, If=45mA,Vf=3.2±0.2V.
8. GENERAL TOLERANCE: ±0.2.
9. THE FRONT POLARIZER IS GLOSSY TYPE.
10. RoHS COMPLIANT.

DOTS DETAILS
DETAIL A:1/50



MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	CAROL 2014.10.10	SCALE : 1/1	MODULE P/N:
CHECKED BY:		UNIT:	MI0220AAT-1A
APPROVED BY:		mm	DESCRIPTION:
VERSION NO:	01		TFT MODULE

01	FIRST ISSUE	2014.10.10
VER.	REVISED DESCRIPTION	DATE