




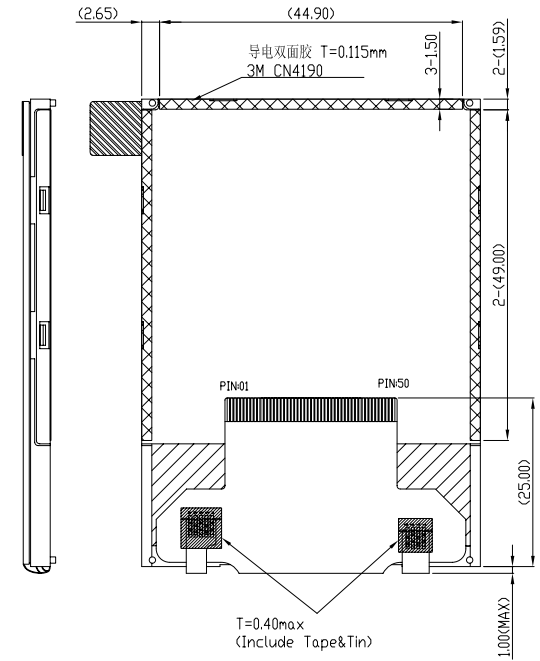


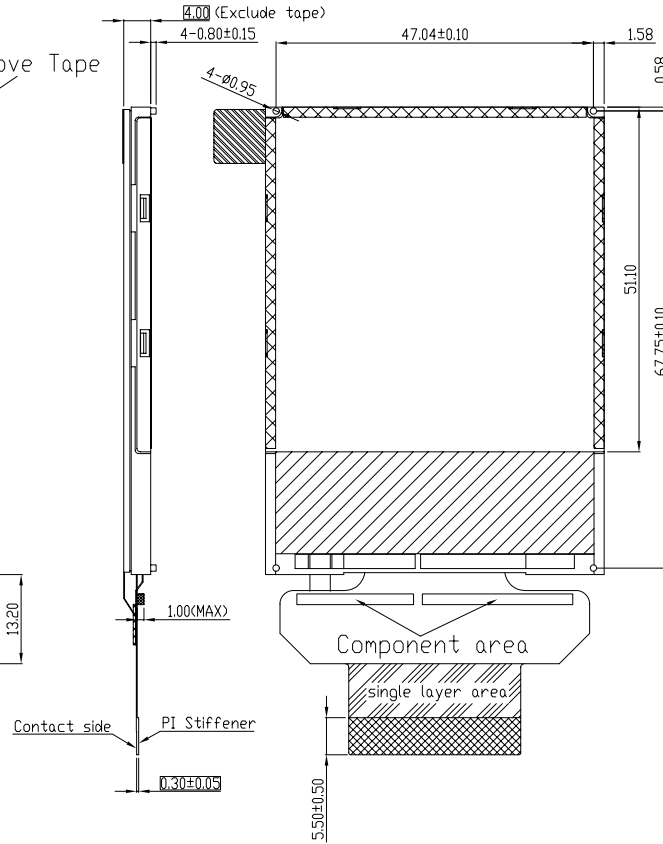


1	LEDK
2	LEDA1
3	LEDA2
4	LEDA3
5	LEDA4
6	IM0
7	IM1
8	IM2
9	IM3
10	RESET
11	VSYN
12	HSYN
13	DOTCLK
14	DE
15	DB17
16	DB16
17	DB15
18	DB14
19	DB13
20	DB12
21	DB11
22	DB10
23	DB9
24	DB8
25	DB7
26	DB6
27	DB5
28	DB4
29	DB3
30	DB2
31	DB1
32	DB0
33	SDO
34	SDI
35	RD
36	WRX(D/CX)
37	D/CX(SCL)
38	CSX
39	TE
40	VDDI
41	VDDI
42	VCI
43	GND
44	X+
45	Y+
46	X-
47	Y-
48	GND
49	GND
50	GND

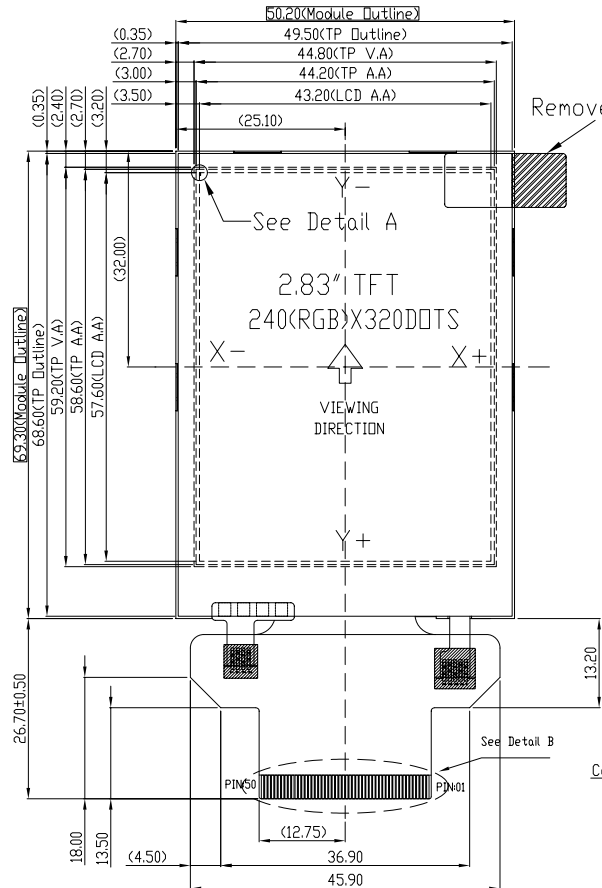

- NOTES:
1. DISPLAY TYPE: TFT
 2. VIEWING DIRECTION: 6:00
 3. POLARIZER MODE: TRANSMISSIVE/POSITIVE
 4. DRIVE METHOD: 1/320 DUTY
 5. IOVCC=2.8V (TYP), VCC=2.8V, VCI=2.8V
 6. OPERATING TEMP: -20° C -- +70° C
 7. STORAGE TEMP: -30° C -- +80° C
 8. LCD DRIVE IC: ILI9341
 9. CONNECTION: FPC
 10. BACKLIGHT: 4CHIP-WHITE LED/80mA/3.2V (TYP)
 11. UNMARKED TOLERANCE: ±0.20
 12. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS
 13. THE CONTROLLED DIMENSION MASK TO BE
 14. REFERENCE DIMENSION MASK TO BE ()



Detail A
Scale 20:1

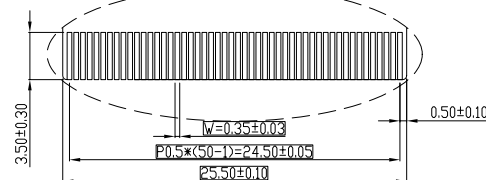

Detail B
Scale 2:1

CUSTOMER APVL	CUSTOMER	DATE	
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	MI0283QT-11	
ENGR CHK	mm	MODEL	
APPROVAL			
MULTI-INNO TECHNOLOGY CO.,LTD.		DWG NO	PAGE
			1/1