

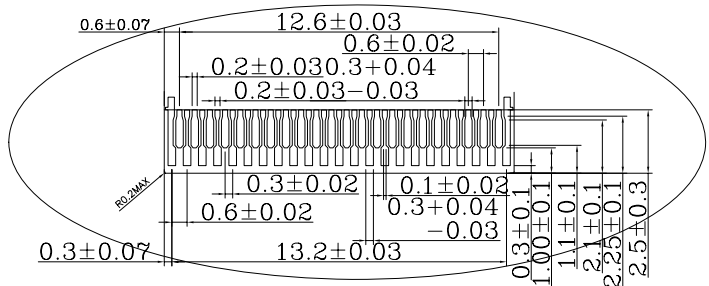
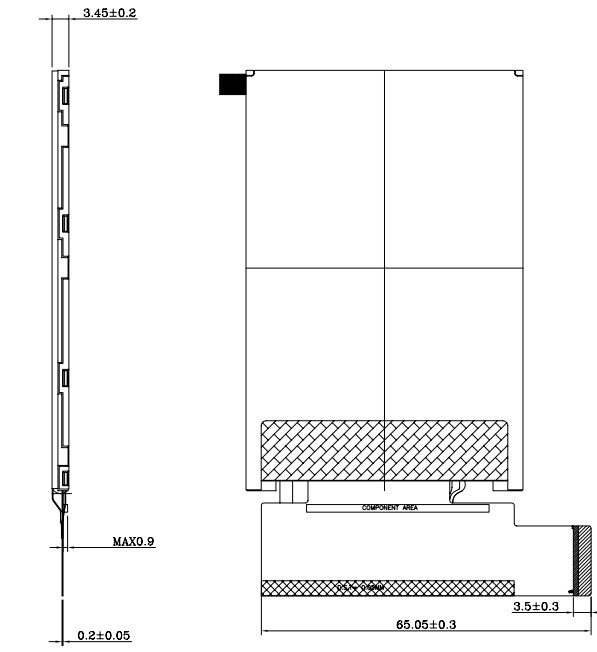


1	GND
2	A
3	A
4	K
5	K
6	GND
7	GND
8	VCC
9	IOVCC (2.8V/1.8V)
10	RESET
11	VSYNC
12	HSYNC
13	GND
14	DOTCLK
15	GND
16	DE
17	D17
18	D16
19	D15
20	D14
21	D13
22	D12
23	D11
24	D10
25	D09
26	D08
27	D07
28	D06
29	D05
30	D04
31	D03
32	D02
33	D01
34	D00
35	SD0
36	SD1
37	RDX
38	WRX/SCL
39	D/CX
40	CSX
41	TE
42	XR
43	YD
44	XL
45	YU

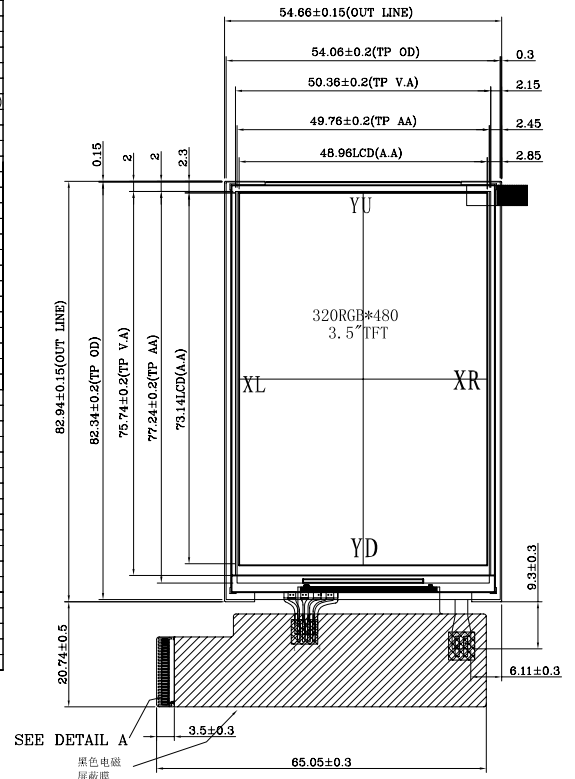

- NOTES:
1. DISPLAY TYPE: TFT,262K,TRANSMISSIVE,NORMALLY BLACK.
 2. OPERATING VOLTAGE: VCC=2.8V
 3. VIEWING DIRECTION: FULL VIEWING ANGLE.
 4. IC DRIVER: HX8357D
 5. OPERATING TEMP: -20°C ~ 70°C.
 6. STORAGE TEMP: -30°C ~ 80°C.
 7. INTERFACE: SPI+RGB 18bit.
 8. LED BACKLIGHT: 6-WHITE LED, If=20mA,Vf=19.2V.
 9. SURFACE LUMINANCE: 290cd/m².
 10. GENERAL TOLERANCE: ±0.2.
 11. CONNECTER: HRS FH26-45S-0.3SHW
 12. RECOMMENDED CASE OPEN AREA SHOULD BE LESS THAN MODULE V.A.
 13. RECONMMENDED CUSHION ADHERENT AREA: TP V.A+1.6mm.
 14. RoHS COMPLIANT.

DETAIL A
SCALE: 5:1

		CUSTOMER APVL		DATE	2014/02/20
		DRAWN	SCALE	TITLE	
		DFTG CHK	UNIT	MI0350AKT	
		ENGR CHK	mm	MODEL	
		APPROVAL			
01	First issue	2014.02.20	DWG NO		
VER.	CONTENT	DATE	PAGE		
MULTI-INNO TECHNOLOGY CO.,LTD.			01	1/1	