






PINS ASSIGNMENTS


NO.	SYMBOL	NO.	SYMBOL
1	LED+	32	R3
2	LED+	33	R2
3	LED-	34	R1
4	LED-	35	RO
5	GND	36	GND
6	VCOM	37	DCLK
7	DVDD	38	GND
8	MODE	39	L/R
9	DE	40	U/D
10	VS	41	VGH
11	HS	42	VGL
12	B7	43	AVDD
13	B6	44	RESET
14	DB5	45	NC
15	B4	46	VCOM
16	B3	47	DITHB
17	B2	48	GND
18	B1	49	NC
19	B0	50	NC
20	G7		
21	G6		
22	G5		
23	G4		
24	G3		
25	G2		
26	G1		
27	G0		
28	R7		
29	R6		
30	R5		
31	R4		

PIN OUT


1	Y+
2	X-
3	Y-
4	X+

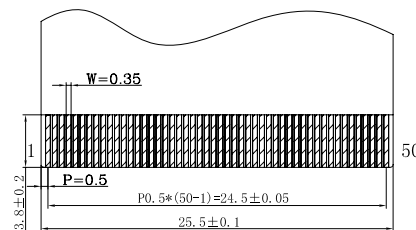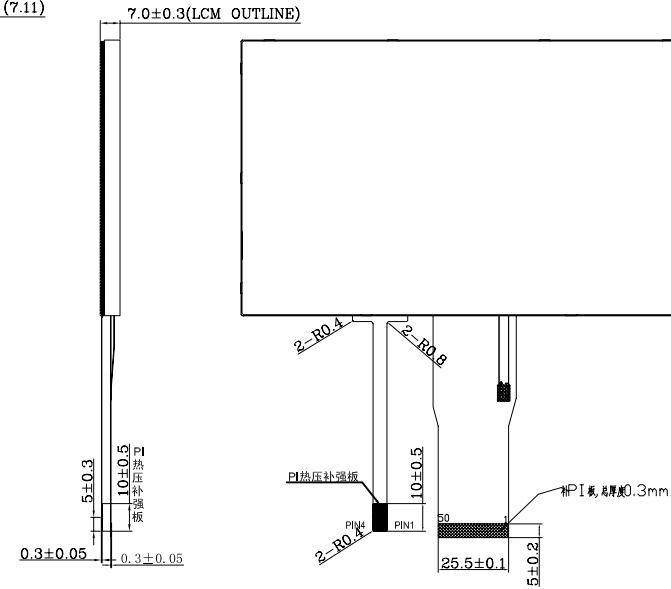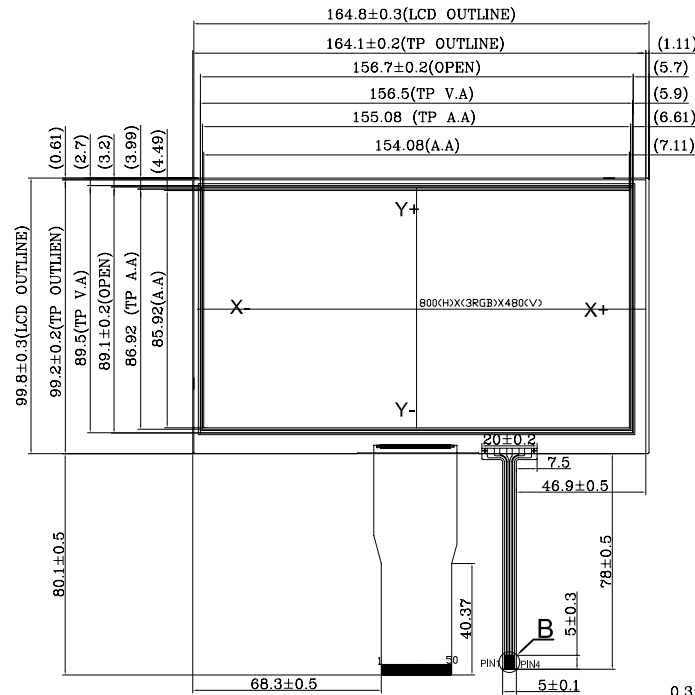

DETAIL A
5:1



Detail B
SCALE 3:1



Backlight LED Circuit

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. DRIVE METHOD: DVDD=3.3V
3. VIEWING DIRECTION: 12 O'CLOCK.
4. IC DRIVER: HX8264+HX8664
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: 21-LED, WHITE LED, If=180mA, Vf=9.6V.
8. UNMARKED TOLERANCE: ±0.2.
9. () REFERENCE DIMENSION.
10. RoHS COMPLIANT.

		CUSTOMER APVL	DATE	2014/07/31
		DRAWN	SCALE	TITLE
		DFTG CHK	UNIT	MI0700S4T-6
		ENGR CHK	mm	MODEL
02	Correct the marked dimensions	2014.07.31	APPROVAL	
01	FIRST ISSUE	2013.07.24		
VER.	CONTENT	DATE	MULTI-INNO TECHNOLOGY CO.,LTD.	DWG NO 02 PAGE 1/1