



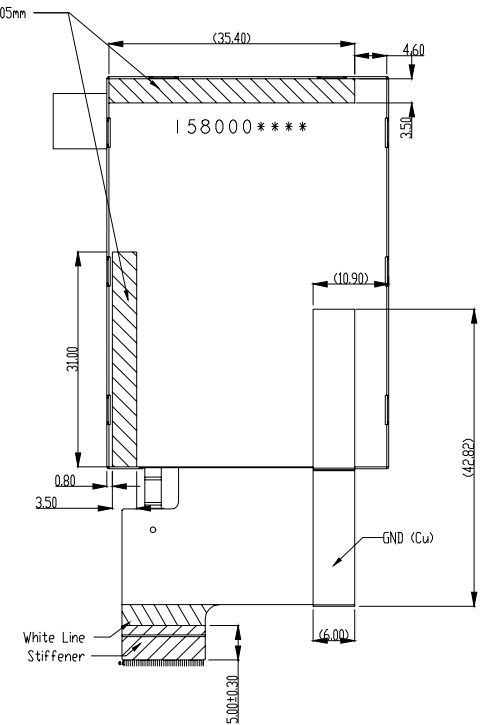

Pin No	Symbol
1	LEDA
2	LEDK
3	GND
4	VDD
5	GND
6	VSYNC
7	RESET
8	GND
9	CS
10	SDO
11	SDI
12	GND
13	SCL
14	GND
15	B5
16	B4
17	B3
18	B2
19	B1
20	B0
21	ENABLE
22	HSYNC
23	GND
24	DCLK
25	GND
26	G5
27	G4
28	G3
29	G2
30	G1
31	G0
32	GND
33	R5
34	R4
35	R3
36	R2
37	R1
38	R0
39	GND

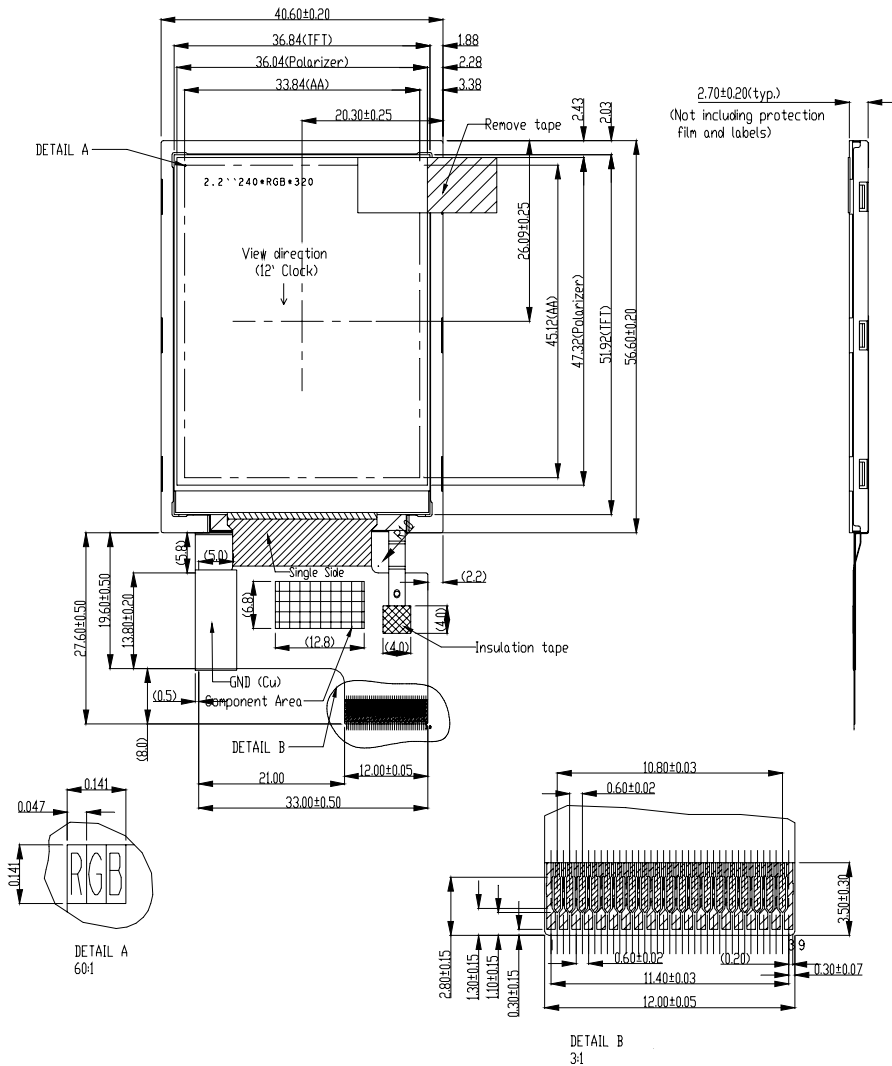

- Notes:
1. Display Type: a-Si TFT (262k color);
 2. Gray Scale inversion: 6 o'clock;
 3. Backlight : 4 LEDs Serials ;
 4. Mating connector: FH23-39S-0.3SHAW
 5. Operating Temperature: -20°C~+70°C;
 6. Storage Temperature: -30°C~+80°C;
 7. unmarked tolerance: R=0.30mm;
 8. Requirement on Environment Protection: RoHS Compliant.

CUSTOMER APVL	CUSTOMER	DATE	
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	MI0220ET-1	
ENGR CHK	mm	MODEL	
APPROVAL			
MULTI-INNO TECHNOLOGY CO.,LTD.		DWG NO	PAGE
			1/1