


WEX012864Q OLED Graphic 128x64 dots

Dimension drawing

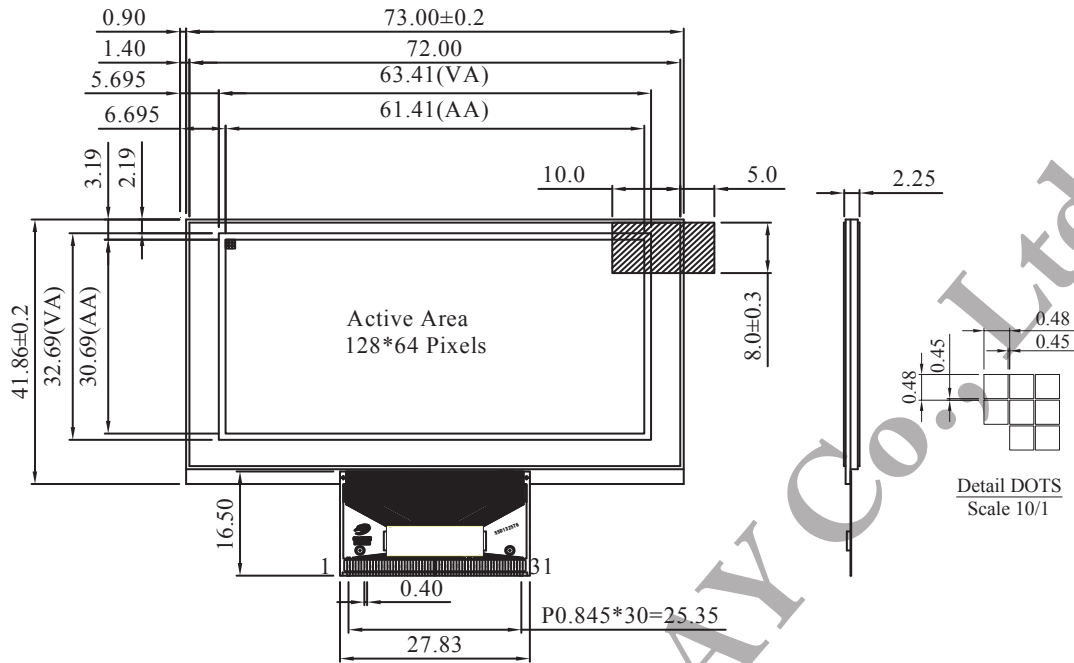

OLED Graphic type

Feature

1. 128x64 dots
2. Built-in Controller SSD1325T6R1
3. +3V power supply
4. 1/64 duty cycle
5. Interface: 6800, 8080, SPI
6. Polarizer optional

Mechanical Date

Item	Dimension	Unit
Module dimension	73.0 × 41.86 × 3.0	mm
View area	63.41 × 32.69	mm
Active area	61.41 × 30.69	mm
Dot Size	0.45 × 0.45	mm
Dot Pitch	0.48 × 0.48	mm

Absolute Maximum Rating

Parameter	Symbol	Min	Max	Unit	Notes
Supply Voltage for Logic	VDD	-0.3	4	V	1, 2
Supply Voltage for Display	VCC	0	16	V	1, 2

Electrical Characteristics

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
VCC	Operating Voltage	-	8	12	16	V
VDD	Logic Supply Voltage	-	2.4	2.7	3.5	V
VOH	High Logic Output Level	IOUT = 100uA, 3.3MHz	0.9*VDD	-	VDD	V
VOL	Low Logic Output Level	IOUT = 100uA, 3.3MHz	0	-	0.1*VDD	V
VIH	High Logic Input Level	IOUT = 100uA, 3.3MHz	0.8*VDD	-	VDD	V
VIL	Low Logic Input Level	IOUT = 100uA, 3.3MHz	0	-	0.2*VDD	V
ISLEEP	Sleep mode Current	No loading	-	0.2	5	uA
ICC	VCC Supply Current VDD=2.7V, external VCC=12V, IREF=10uA, Frame rate=110Hz, All one pattern, Display on, no loading	Contrast = 7F	-	700	-	uA
IDD	VDD Supply Current VDD=2.7V, external VCC=12V, IREF=10uA, Frame rate=110Hz, All one pattern, Display on, no loading	Contrast = 7F	-	-	650	uA
ISEG	Segment Output Current VDD=2.7V, VCC=12V, IREF=10uA, Frame rate=110Hz, Display on, Segment pin under test is connected with a 20K resistive load to VSS	Contrast = 7F	270	300	370	uA
		Contrast = 5F	-	225	-	
		Contrast = 3F	-	150	-	
		Contrast = 1F	-	75	-	
Dev	Segment output current uniformly/VDD=2.7V, VCC=12V, IREF=10uA, Contrast=7F	Adjacent pin	-	±2	-	%
		Overall pin to pin	-	-	±3	
Vcc	DC-DC converter output voltage	VDD input=3V, L=22uH; R1=450Kohm; R2=50Kohm; Icc = 20mA(loading)	10	-	12	V
Pwr	DC-DC converter output power	VDD input=3V, L=22uH; Vcc = 12V	-	-	400	mW

No.	Symbol	I/O	Description								
1	NC(GND)		Reserved Pin (Supporting Pin)								
2	VCC	P	Power Supply for OLED Panel								
3	VCOMH	P	Voltage Output High Level for COM Signal								
4	IREF	I	Current Reference for Brightness Adjustment								
5~12	D7~D0	I/O	Host Data Input/Output Bus								
13	E/RD#	I	Read/Write Enable or Read								
14	R/W#	I	Read/Write Select or Write								
15	D/C#	I	Data/Command Control								
16	RES#	I	Power Reset for Controller and Driver								
17	CS#	I	Chip Select								
18	NC		Reserved Pin								
			The N.C. pins between function pins are reserved for compatible and flexible design.								
			Communicating Protocol Select								
			These pins are MCU interface selection input. See the following table:								
19	BS2	I	68XX-parallel								
			80XX-parallel								
			Serial								
20	BS1		<table border="1" style="width: 100%;"> <tr> <td>BS1</td> <td>0</td> <td>1</td> <td>0</td> </tr> <tr> <td>BS2</td> <td>1</td> <td>1</td> <td>0</td> </tr> </table>	BS1	0	1	0	BS2	1	1	0
BS1	0	1	0								
BS2	1	1	0								
21	Vdd	P	Power Supply for Logic Circuit								
22	NC		Reserved Pin								
23	NC		The N.C. pins between function pins are reserved for compatible and flexible design.								
24	NC										
25	NC										
26	NC										
27	NC										
28	NC										
29	Vss	P	Ground of OLED System								
30	VSL	0	Voltage Output Low Level for SEG Signal								