




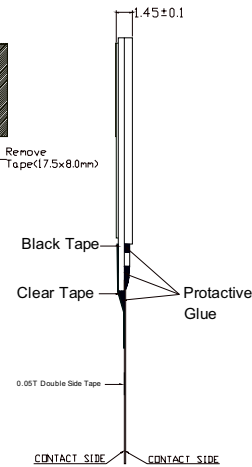


环保标准
ROHS标准
有害物质管理标准

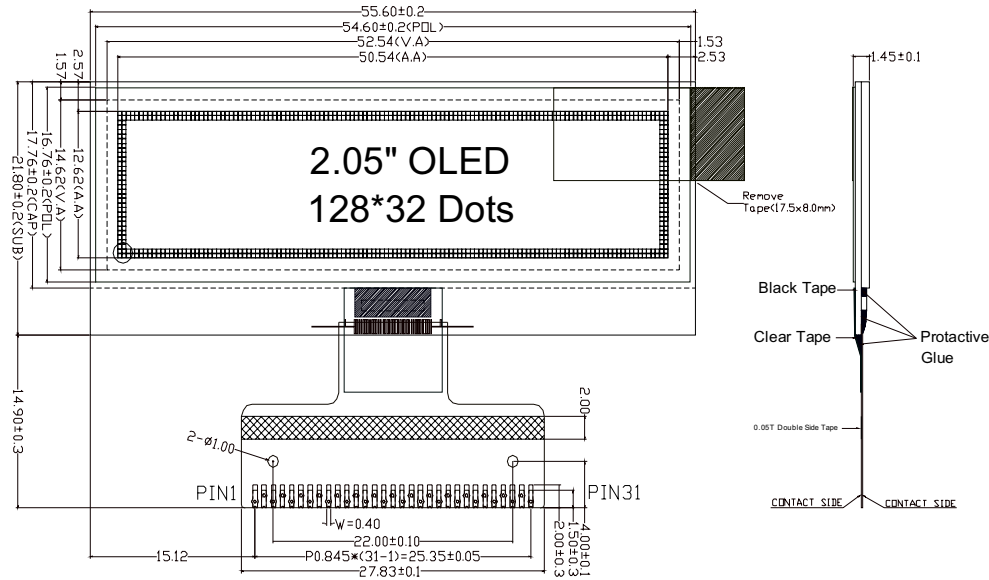

PIN DESCRIPTION

NO.	SYMBOL	NO.	SYMBOL
1	NC	17	CS#
2	VCC	18	NC
3	VCOMH	19	BS2
4	IREF	20	BS1
5	D7	21	VDD
6	D6	22	NC
7	D5	23	NC
8	D4	24	NC
9	D3	25	NC
10	D2	26	NC
11	D1	27	NC
12	D0	28	NC
13	RD#	29	NC
14	WR#	30	VSS
15	D/C#	31	NC
16	RES#		



NOTES:

1. OPERATING TEMP: -20° C TO 70° C
2. STORAGE TEMP: -30° C TO 80° C
3. VIEWING DIRECTION: ALL
4. OLED DRIVE IC: SSD1309Z
5. DISPLAY COLOR: White
6. UNSPECIFIED TOLERANCES: ± 0.2mm.
7. () MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER

(客户在装机时，自己必须撕掉保护膜)

CUSTOMER APVL		DATE	
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	MI12832KO-W	
ENGR CHK	mm	MODEL	
APPROVAL			
MULTI-INNO TECHNOLOGY CO.,LTD.		DWG NO	PAGE
			1/1